



THERMOFIX® - TFE

DOUBLE-BELT PRESS

FLATBED LAMINATOR

TECHNICAL DATA

» Heating & Cooling – Standard Sizes

TFE-S (Hot/Cold Zones):	1.500mm / 1.200mm
TFE-M (Hot/Cold Zones):	2.400mm / 1.200mm
TFE-L (Hot/Cold Zones):	2.400mm / 2.400mm

Process temperature: Up to 230°C

Heating zones: Individually controllable

Heating / Cooling Medium: Electrical / Water

» Speed & Performance

Machine Speed:	Up to 30 m/min
Inlet Width (200mm steps):	1.200mm to 2.600mm
Product thickness:	Up to 200mm
Versions:	Economic & Performance

» Calender


APPLICATIONS

» Textile Lamination

Outerwear, Reflecting Strips, Artificial Leather, Furniture, Glass Mats, Filters, Membranes and many more...

» Composite Consolidation

Honeycomb Door Panels, Concrete Castings, Shelves & Cabinets, CFK-Lightweights and many more...

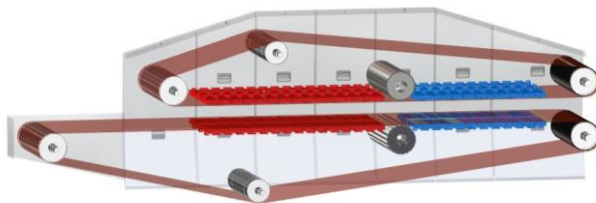

WE WELCOME YOU IN OUR TECHNOLOGY CENTER –
Let us help you to develop your product



» Mobiltech



» Composite / Bontech




» Textile / Clothtech



» Buildtech



» Hometech

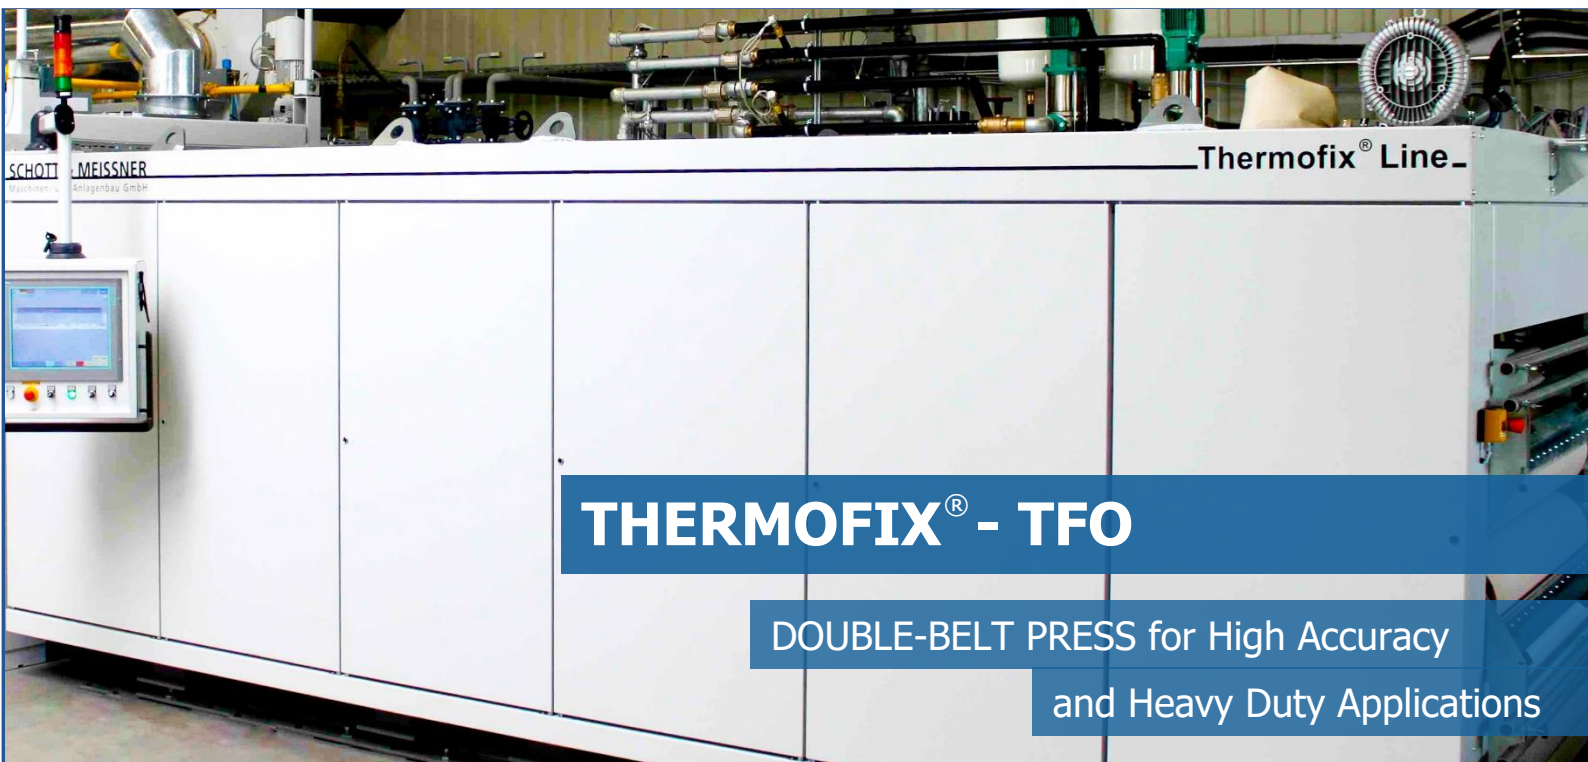

THERMOFIX® - TFO

DOUBLE-BELT PRESS for High Accuracy
and Heavy Duty Applications

TECHNICAL DATA

» Heating & Cooling – Flexible Modular Design

Modules: 2.000mm or 3.000mm

Machines Sizes: 1,2,3

Process temperature: Up to 260°C

Heating zones: Individually controllable

Heating / Cooling Medium: Thermal-Oil / Water

» Speed & Performance

Machine Speed: Up to 25 m/min

Inlet Width (200mm steps): 1.200mm to 3.100mm

Product thickness: Up to 200mm (size 1,2)
Up to 500mm (size 3)

» Calender


APPLICATIONS

» Textile Lamination

Outerwear, Reflecting Strips, Artificial Leather, Furniture, Glass Mats, Filters, Membranes and many more...

» Composite & Nonwovens Consolidation

Honeycomb Door Panels, Concrete Castings, Shelves & Cabinets, CFK-Lightweights, Flooring and many more...

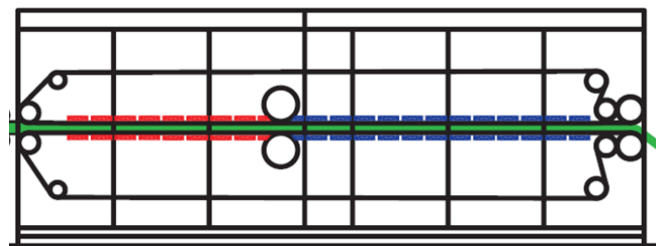

WE WELCOME YOU IN OUR TECHNOLOGY CENTER –
Let us help you to develop your product



» Homotech

» Composite / Bontech

» Textile / Clothtech

» Buildtech

» Mobiltech